
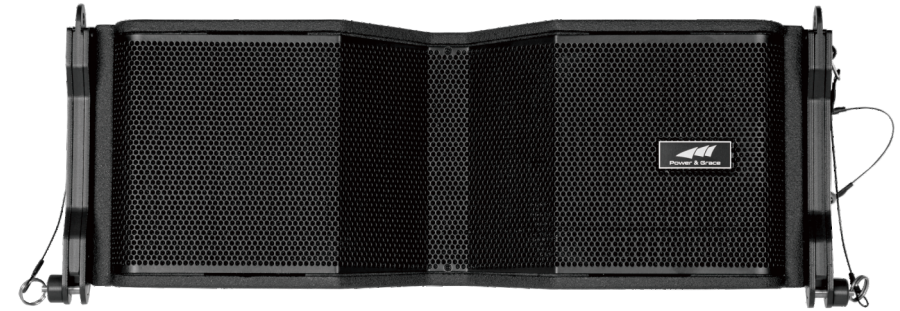


Line Array Speaker

FEATURES

- Precision multi-angle rigging system with quick and easy installation
- Enhanced frequency response, clarity, and resolution
- Durable enclosure built from multi-layer plywood
- High flexibility and scalability for diverse setups
- High-density hybrid acoustic absorption materials
- Ultra-low distortion with fast transient response
- Eco-friendly textured steel paint finish for surface protection
- Reinforced steel grille with specialized hard-coating
- Suitable for small to mid-sized live events, concert halls, churches, and multifunction venues

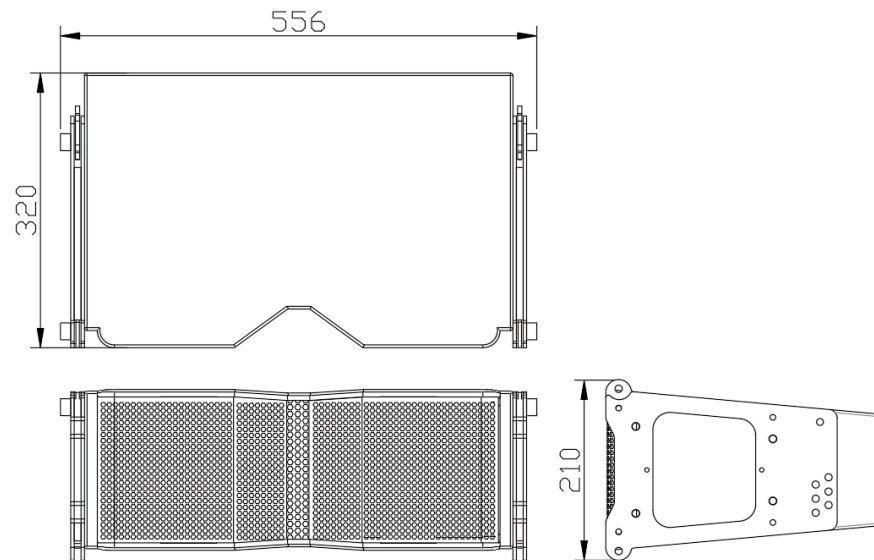


TECHNIQUE INDEX

Model	LAP-350	LAP-350N
Model Type	Ferrite Magnet Unit	Neodymium Magnet Unit
High Frequency Driver	1.7" voice coil HF driver	
Low Frequency Drivers	2 × 6.5" drivers with 2.5" voice coils	
Frequency Response [-6 dB]	70 Hz – 20 kHz	
Nominal Impedance	8 Ω	
Maximum SPL	128 dB	
Directivity	Horizontal 110° × Vertical 10°	
Power Rating (RMS)	350 W	
Peak Power	1400 W	
Enclosure Material	15 mm multi-ply plywood	
Handles	2 (left side)	
Dimensions (W × H × D)	532 mm × 210 mm × 320 mm	

Active Subwoofer with DSP

FEATURES

- Ultra-low distortion driver
- Multi-channel Class D amplification
- Built-in DSP active system Multiple factory presets available
- Enhanced flexibility and scalability
- Durable, scratch-resistant textured steel paint finish
- Compact design for easy transport and space-saving
- Configurable cardioid or omnidirectional subwoofer modes
- Ideal for clubs, multifunctional halls, and live music events

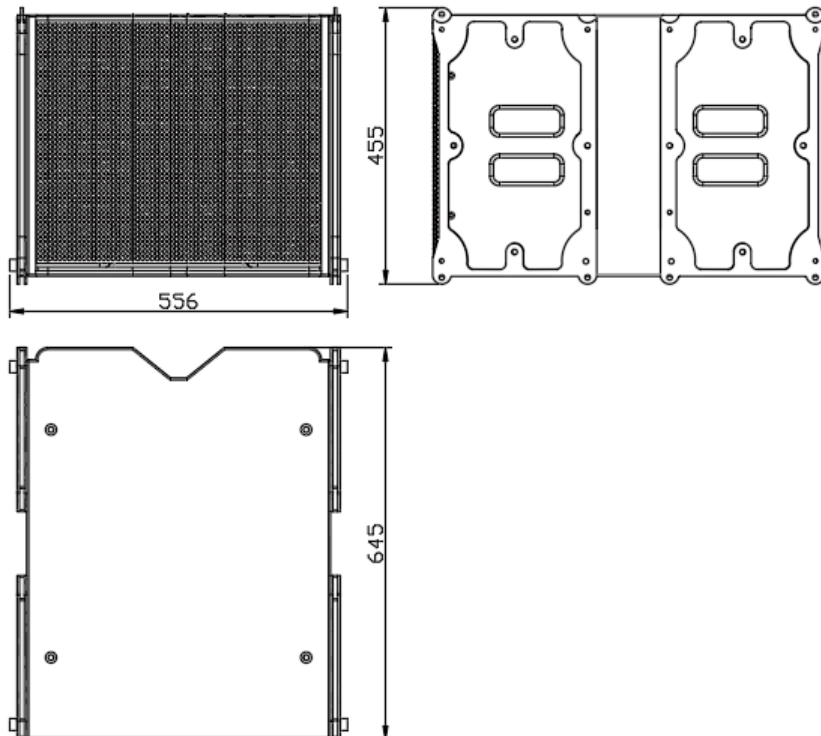

TECHNIQUE INDEX

Model	LSUBA-15DSP
Low Frequency Driver	15" with 4" voice coil
Frequency Response [-6 dB]	35 Hz – 200 Hz
Nominal Impedance	8 Ω
Maximum SPL	136 dB
Directivity	Omnidirectional or cardioid selectable
Peak Power	3200 W
Amplifier Type	Class D
DSP Processor	56-bit Controller DSP
AD/DA Converter	24-bit / 48 kHz
System Presets	Music, Live, Flat, Speech, Show
Enclosure Material	15 mm plywood
Handles	4 (left side)
Dimensions (W × H × D)	532 mm × 455 mm × 645 mm